




SALERNO

Porcelain Tile



MONTECERA
— TILE & STONE —




60 x 120 cm (24" x 48")
SALERNO
Polished & Rectified

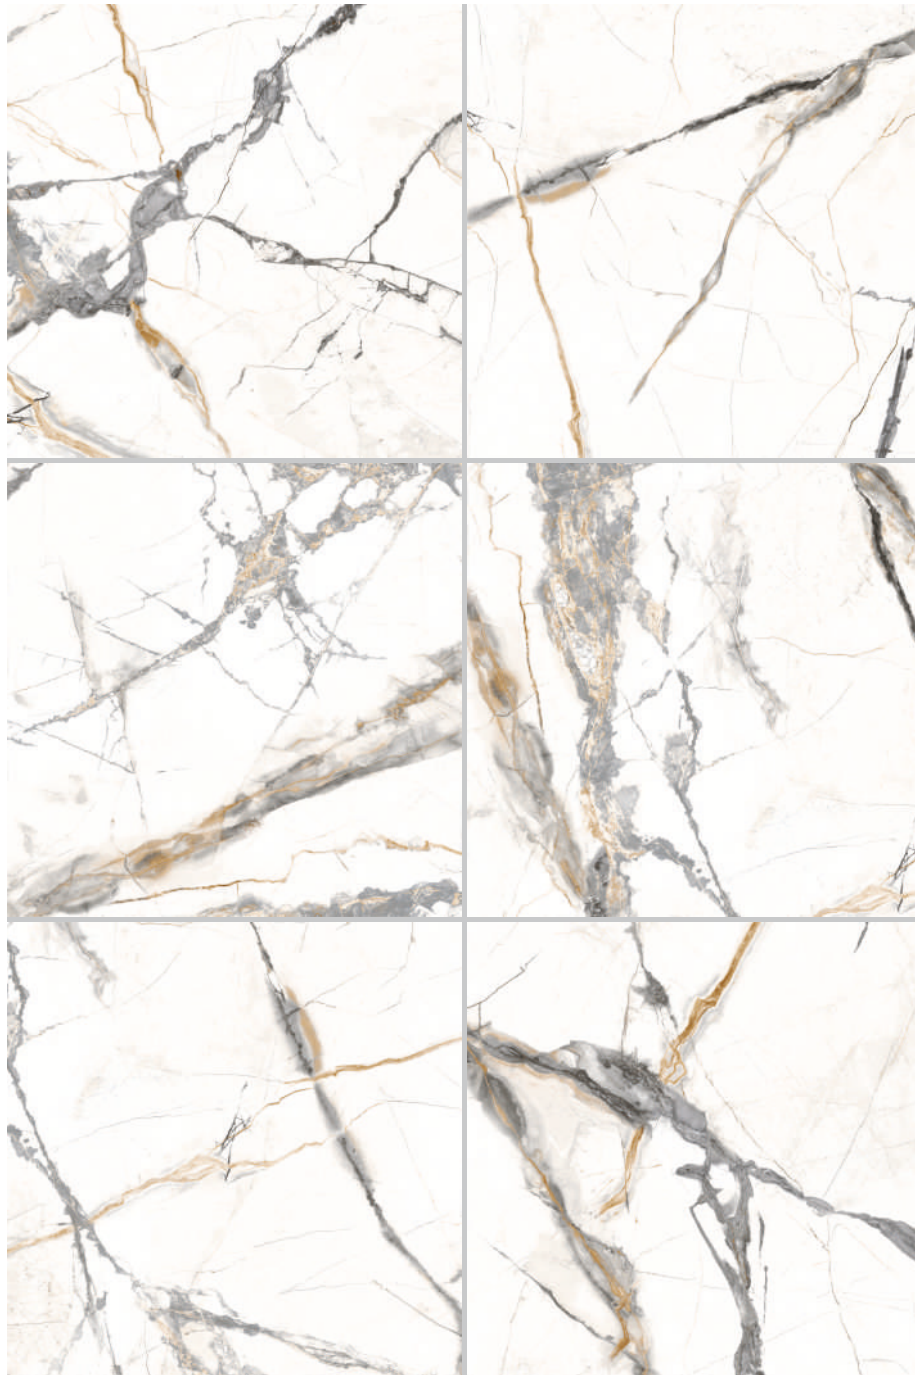


60 x 60 cm (24" x 24")
SALERNO Rectified

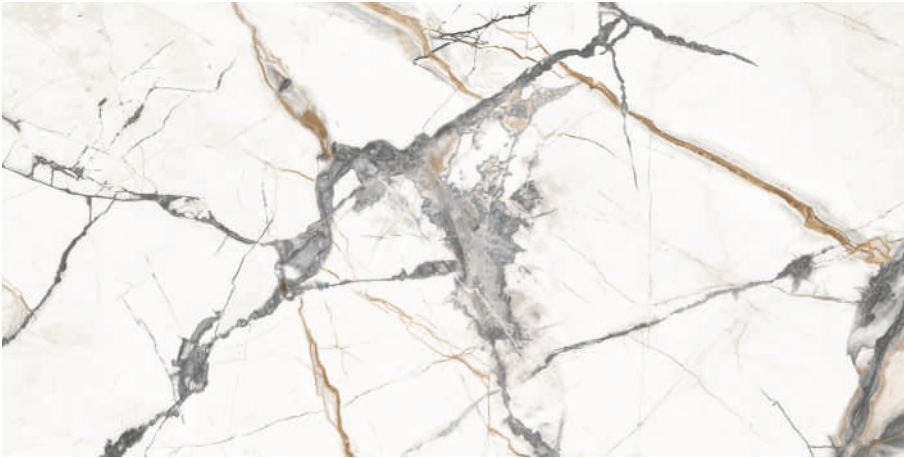

60 x 120 cm (24" x 48")
SALERNO Rectified

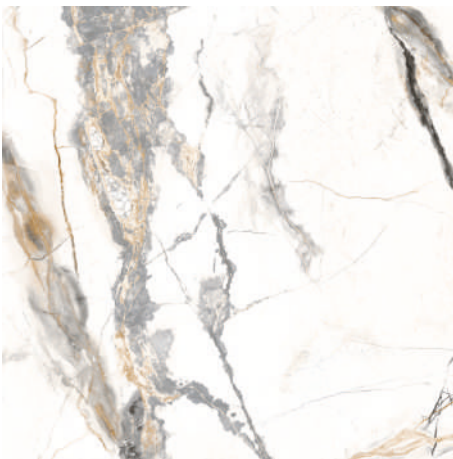


60 x 60 cm (24" x 24")
SALERNO Rectified

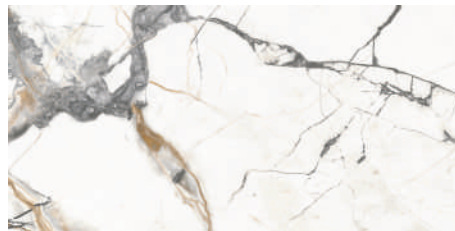


30 x 60 cm (12" x 24")
SALERNO Rectified




7,5 x 30 cm (3" x 12")
SALERNO
Bullnose




5 x 5 cm (30 x 30)
2" x 2" (12" x 12")
SALERNO
Mosaics




5 x 5 (2" x 2")
28 x 33 (11" x 13")
SALERNO
Hexagon Mosaics




2,2x7,2 (1" x 3")
31 x 23 (12" x 9")
SALERNO
Herringbone Mosaics

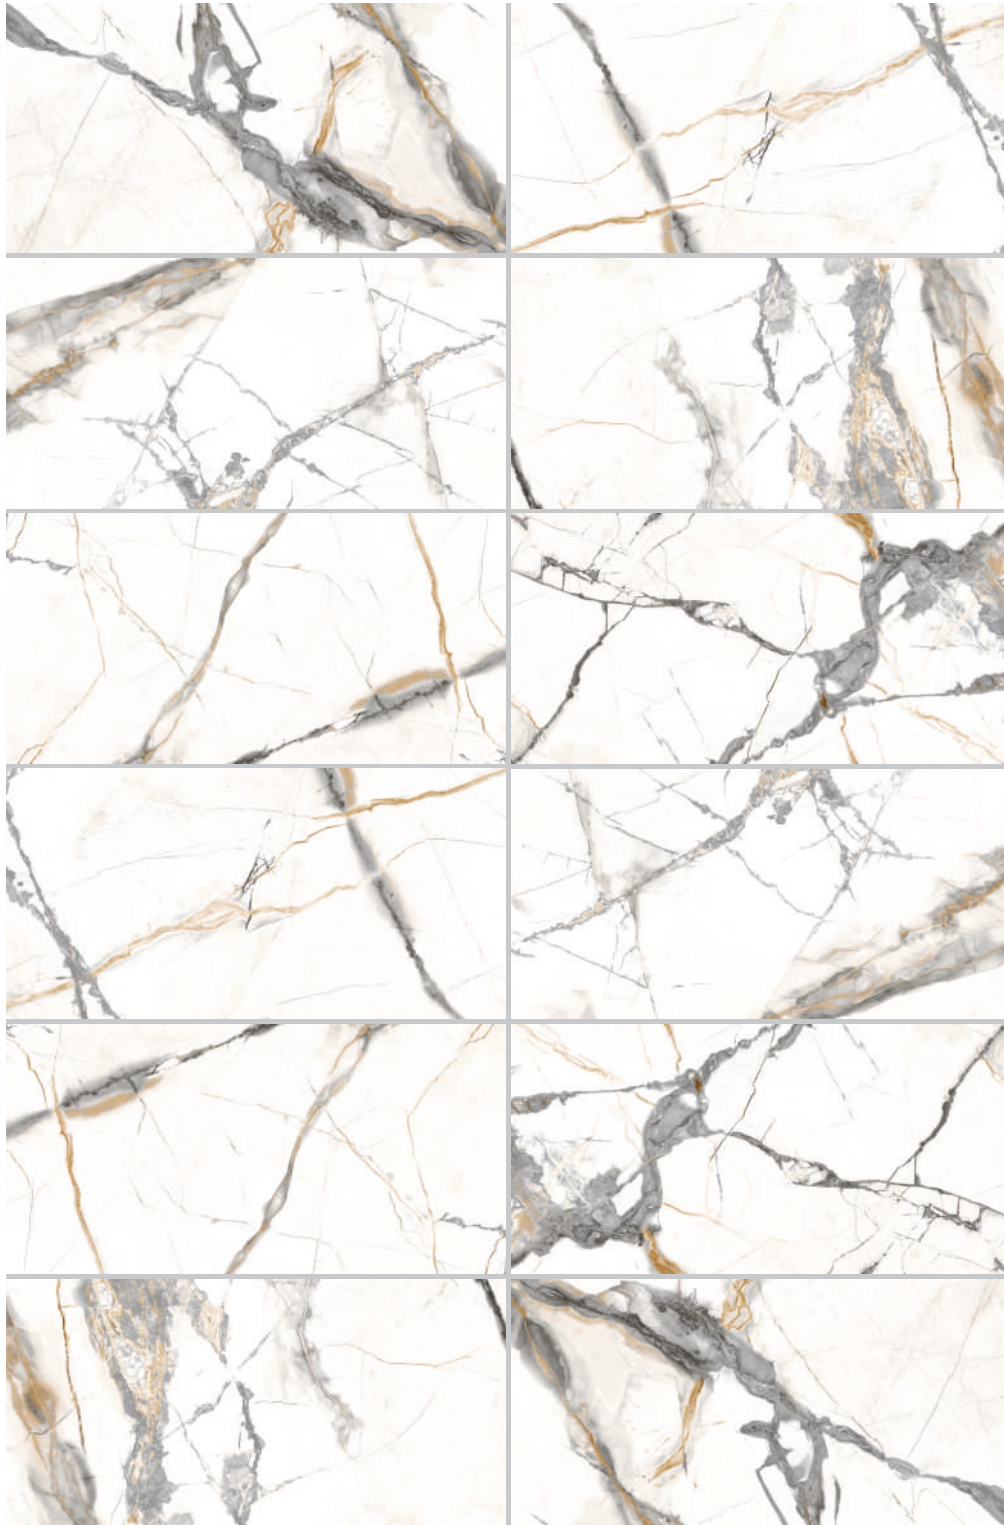


30 x 60 cm (12" x 24")
SALERNO Polished & Rectified

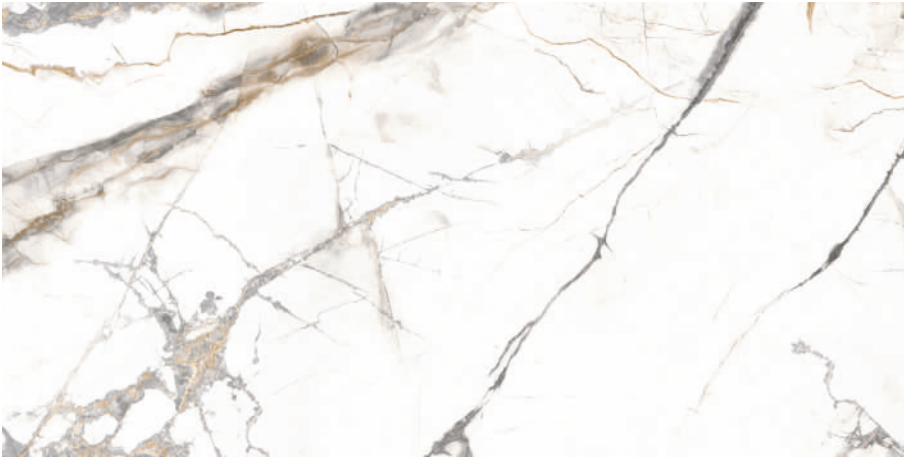

60 x 120 cm (24" x 48")
SALERNO Polished & Rectified

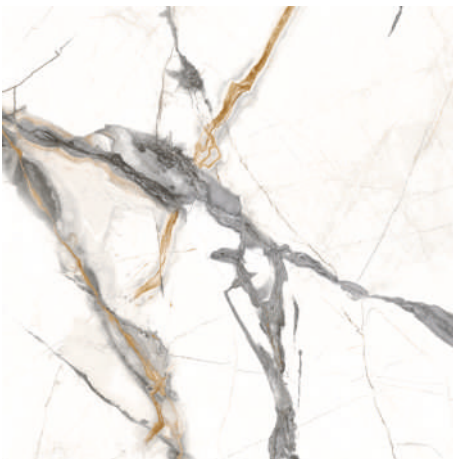


60 x 60 cm (24" x 24")
SALERNO Polished & Rectified

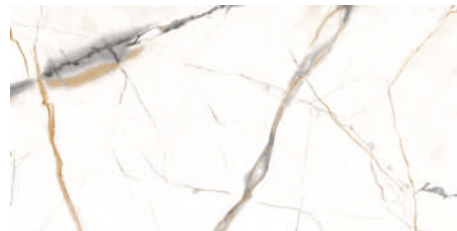


30 x 60 cm (12" x 24")
SALERNO Polished & Rectified




7,5 x 30 cm (3" x 12")
SALERNO
Polished Rectified Bullnose



5 x 5 cm (30 x 30)
2" x 2" (12" x 12")
SALERNO Polished
Mosaics



5 x 5 (2" x 2")
28 x 33 (11" x 13")
SALERNO Polished
Hexagon Mosaics



2,2x7,2 (1" x 3")
31 x 23 (12" x 9")
SALERNO
Herringbone Mosaics



GENERAL SPECIFICATIONS

		Appendix G Group BlaSerie: SALERNO Porcelain tiles Appendix G Group Bia			MONTECERA AVERAGE VALUE	
TECHNICAL FEATURES	NORMS	Requirement for Nominal Size N.			SALERNO	
		7 cm ≤ N < 15 cm	N ≥ 15 cm		Matt	Polished
LENGTH AND WIDTH	EN ISO 10545-2	±0,9mm.	± 0,6%	±2,0mm	Confirmed	Confirmed
THICKNESS	EN ISO 10545-2	±0,5mm.	± 0,5%		Confirmed	Confirmed
STRAIGHTNESS	EN ISO 10545-2	±0,75mm.	± 0,5%	±1,5mm	Confirmed	Confirmed
SQUARNESS	EN ISO 10545-2	±0,75mm.	± 0,6%	±2,0mm	Confirmed	Confirmed
SURFACE FLATNESS	EN ISO 10545-2	±0,75mm.	± 0,5%	±2,0mm	Confirmed	Confirmed
WATER ABSORPTION	EN ISO 10545-3	≤ 0,5%			≤ 0,5%	≤ 0,5%
BREAKING STRENGTH	EN ISO 10545-4	1300 N			1400 N	1400 N
MODULUS OF RUPTURE	EN ISO 10545-4	≥35 N/mm ²			≥ 40 N/mm ²	≥ 40 N/mm ²
THERMAL SHOCK RESISTANCE	EN ISO 10545-9	Required			Resistant	Resistant
FROST RESISTANCE	EN ISO 10545-12	Required			Resistant	Resistant
CHEMICAL RESISTANCE	EN ISO 10545-13	Indicated by manufacturer			Resistant	Resistant
RESISTANCE TO STAINS	EN ISO 10545-14	Indicated by manufacturer			Resistant	Resistant
DCOF (Wet)	ANSI B 101.3	Indicated by manufacturer			> 0,42	< 0,42
SCRATCH HARDNESS (MOHS)		Indicated by manufacturer			Min. 6	Min. 6
ABRASION RESISTANCE (PEI)	EN ISO 10545-7	Indicated by manufacturer			4	4
SHADE VARIATION		Indicated by manufacturer			V3	V3